




MCS-IO-EXT

Description & Specifications

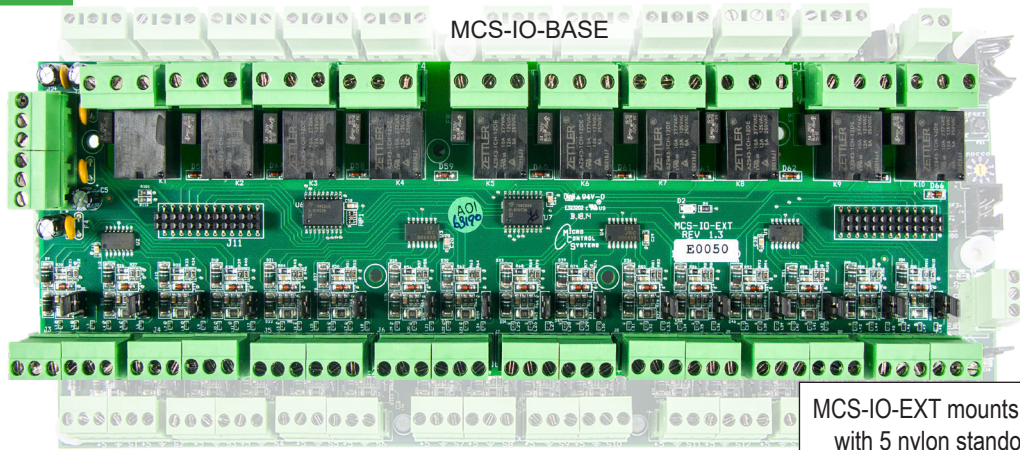

MCS-IO-EXT mounts to the MCS-IO-BASE with 5 nylon standoffs and two stackers



Part # MCS-IO-EXT

Description

The **MCS-IO-EXT** provides a flexible and cost effective way to allow relay output, sensor input and analog output expansion for **MCS MAGNUM** and **Micromag**. Each MCS-IO-EXT can be paired with a MCS-IO-BASE to double the number of inputs and outputs. Each MCS-IO-EXT board is powered by the MCS-IO-BASE board once it is stacked on top. The printed circuit board is a four layer board with a separate power and ground plane to provide the ultimate in efficient electrical noise suppression. This coupled with noise suppression circuitry makes the MCS-IO-EXT virtually impervious to electrical noise. The MCS-IO-EXT provides sixteen sensor inputs. The inputs are universal and support either a digital or analog input signal.

The MCS-IO-EXT also provides four analog outputs that provide independent dc voltage outputs from 0 to 10vdc. These analog outputs are controlled by the MAGNUM/Micromag micro controllers.

Each input and output consists of a three position removable terminal block, providing +5vdc, ground and signal in. A polyfuse protects the +5vdc line from shorted sensors. The MCS-IO-base also provides ten relay outputs fused at 5.0 amps. Each relay output provides common, normally open and normally closed contacts on a removable terminal block. The terminal blocks provide screw connections which eliminate the need for sta-cons. Because the terminal blocks are removable, board replacement requires no wires to be removed. Once the MCS-IO-EXT is paired with the MCS-IO-BASE the number of sensors are expanded from 16 to 32, the number of analog outputs from 4 to 8, and the number of relays from 10 to 20 allowing twice the number of sensors, analog outputs, and relay outputs in the same footprint of one MCS-IO-BASE.

Specifications

Controller

Dimensions.....	10.7"l, x 3.5"w, 2.50"h
Mounting.....	Mounts on top of the MCS-IO-BASE on top of the MCS-IO-BASE by 5 nylon standoffs and 2 stackers headers (included on MCS-IO-BASE)
Operating Temperature.....	-40°F to +158°F (-40°C to +70°C)
Operating Humidity.....	0-95% Non-Condensing
Storage Temperature.....	-40°F to +158°F (-40°C to +70°C)
Sensor Inputs	16 inputs on base 0-5vdc with MCS-IO-EXT - 32 inputs total
Analog Outputs.....	4 outputs on base 0-10vdc with MCS-IO-EXT - 8 AO outputs
Relay Outputs	10 outputs on base 5amps @ 230VAC
Printed Circuit Board	Four layer with separate power and ground planes
Input Power	Powered by MCS-IO-BASE Power 12 vdc Regulated Power Supply
Minimum (Brown in)	9.29 vdc
Amp Draw (Loaded)	1.02 Amps
Power Detection	Automatic Power Fail Reset on MCS-IO-BASE

Packaging

MCS-SHIELDWIRE-GROUNDING multi-terminal splicing connector with 9"- 16 awg wire with ring terminal (package of 2).

Kit of (5) #6-32 x 1" Female/Female Hex Nylon Tapped Spacers

Kit of (1) 12 Pin Double Strip Header, 2.54mm Center, Straight

Installation Sheet

Ship Weight 1.21 lb (approx)
Box Dimensions..... 12" x 5" x 3" (approx)

