MCS-COMPACT
MCS-COMPACT to MCS-MAGNUM

Installation Diagram

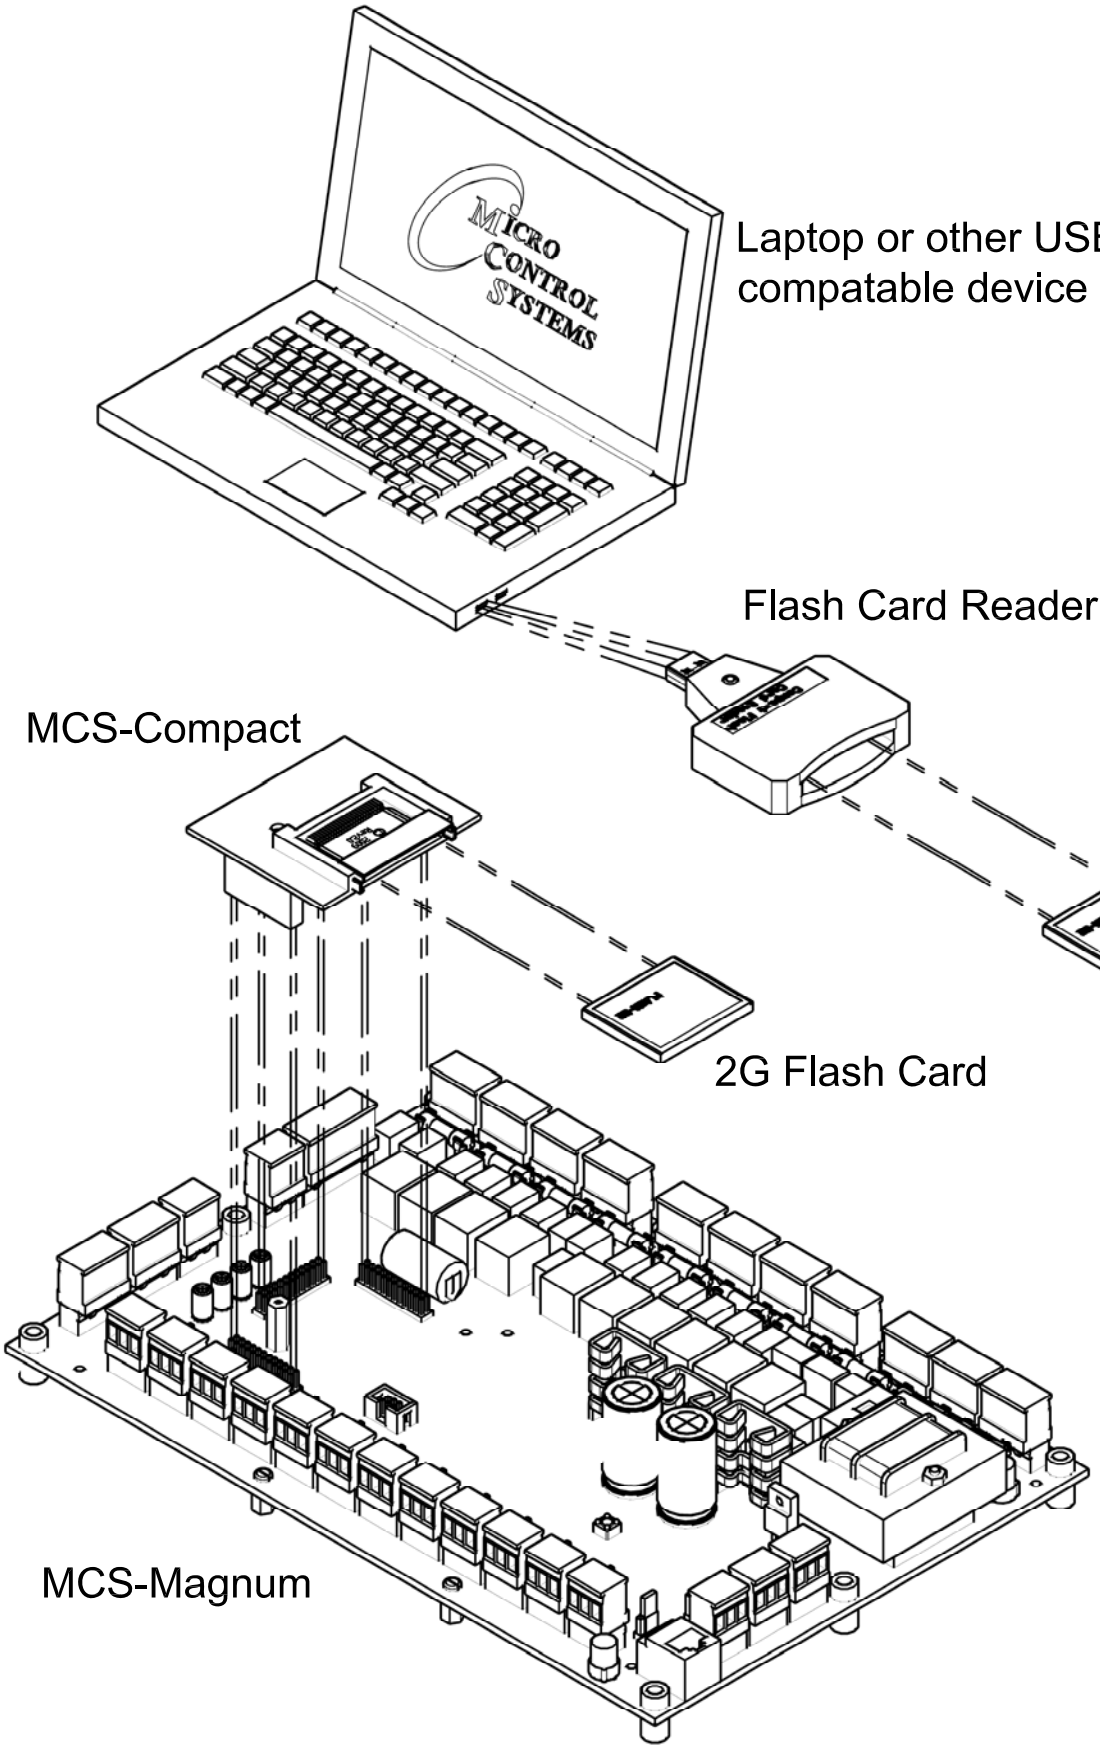

Directions:

1. Remove the plastic nut from the MAGNUM-N board where the MCS-COMPACT is meant to be placed.

2. Insert the MCS-COMPACT into the aforementioned area. Make sure all three ports are fully connected to the MAGNUM-N board.

3. Slide the FLASH-2G into the port of the MCS-COMPACT.

4. Once your data has been collected, remove the FLASH-2G from the MCS-COMPACT and insert it into the Compact Flash Card Reader.

5. Plug the Card Reader into the USB port of the computer, thereby connecting the FLASH-2G to the computer.

5580 Enterprise Pkwy, Fort Myers, FL 33905 USA
Phone: (239) 694 0089 - Fax: (239) 694 0031
www.mcscontrols.com - support@mcscontrols.com