




MCS-MAGNUM-DOOR-NEMA4-12

Description & Specifications

Waterproof Keypad

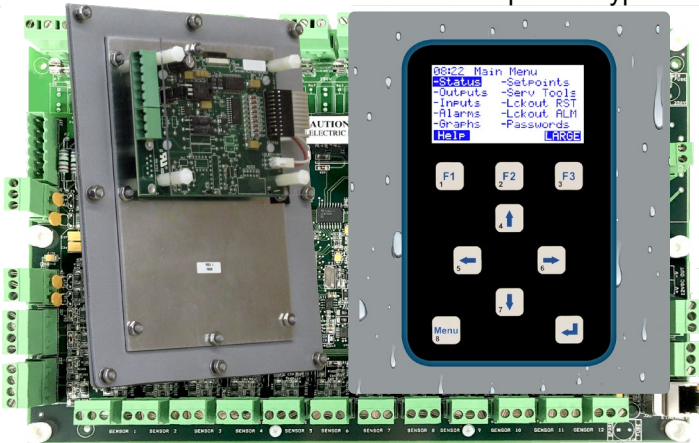

Part # MCS-MAGNUM-12-DOOR-NEMA4



Description

The MCS-MAGNUM-DOOR-NEMA4-12 has been sealed in its own frame using a new Gasket (BISCO HT-800 Medium Cellular Silicone). The RS485 port has been added to the back of the Keypad. Moving the communicating port to the back, adding the new gasket, provides the unit with a NEMA4 rating. Operating Temperature -4°F to +158°F (-20°C to +70°C)

The MCS-MAGNUM is a durable microprocessor based controller designed for the hostile environments in the HVAC/R industry. It is designed to be the primary manager of the package it is controlling.

The Magnum provides flexibility with setpoints and control options that can be selected prior to commissioning a system or when the unit is live and functioning. Displays, alarms and other interfaces are accomplished in a clear and simple language that informs the user as to the status of the controller.

The MCS-MAGNUM-DOOR-NEMA4-12 consists of a control board along with a keypad and display. Complementing the Magnum micro controller are the MCS-RO-BASE/EXT and MCS-SI-BASE/EXT expansion boards. This allows for system expansion to a maximum of 112 inputs, and 108 outputs. Communication with these units occurs at 38,400 baud over the MCS-I/O port, which is dedicated to this purpose.

Other new features include the integration of BACnet IP, Modbus IP and Modbus RTU into the Magnum. A MCS-BMS-GATEWAY is also available that allows communication via BACnet MSTP and LonWorks, or the data format is available to allow the user to communicate directly.

A complete software support package is available for your PC, allowing for system configuration, dynamic on-line display screens, remote communication, graphing and more.

POWER SUPPLY NOT INCLUDED

Specifications

Controller

- Dimensions..... 12.0" w, 8.0" h, 2.0" d
- Mounting Holes..... Mounts on a backplane utilizing eight through-hole studs
- Operating Temperature..... -40°F to +158°F (-40°C to +70°C)
- Operating Humidity..... 0-95% Non-Condensing
- Storage Temperature..... -40°F to +158°F (-40°C to +70°C)
- Microprocessor..... Zilog eZ80 Acclaim! @ 50mhz
- Sensor Inputs (SI)..... 12 inputs 0-5vdc (10-bit A/D)
- Digital Inputs..... 4 inputs 0 or 5vdc only
- Relay Outputs (RO)..... 10 outputs 6.3amps @ 230vac
- Analog Outputs (AO)..... 4 outputs 0-10vdc
- Printed Circuit Board..... Six layer with separate power and ground planes
- Input Power (Standard)..... 12 vdc Regulated Power Supply
- Minimum (Brown in)..... 9.44 vdc
- Amp Draw (Loaded)..... 857.0 mA
- MCS-I/O Com Port..... 1 @ 38,400 baud
- RS-485 Com Port..... 1 @ 19,200 baud
- Ethernet..... 10/100 Mbps Ethernet
- Real Time Clock..... Battery backup
- Power Detection..... Automatic power fail reset

Keypad/LCD

- Display..... 128 x 64 dot pixel STN monochrome graphics LCD with 2.8" diagonal viewing area
- Gasket Material..... HT-800 Medium Cellular Silicone NEMA 4
- Color..... White characters on a blue background (Reversible)
- Keypad Size..... 7.25" w x 8.50" h x 1.77" d (8 mounting studs)
- Keypad Layout..... 9 keys (3 function keys)
- Connection..... 6 conductor shielded cable (max length of cable is 10 feet)
- RS485 Com Port..... 1 @ 19200 Baud
- Operating Temperature..... -4°F to +158°F (-20°C to +70°C)
- Operating Humidity..... 0-95% Non-Condensing
- Storage Temperature..... -22°F to +185°F (-30°C to +85°C)

Packaging

MCS-SHIELDWIRE-GROUNDING multi-terminal splicing connector with 9" - 16 awg wire with ring terminal (package of 2).



MAG-KEYPAD to MAGNUM 6 Conductor Cable with connectors

MAGNUM MOUNTING HARDWARE KIT

(8) #6-20 x 1" phillips pan head zinc plated steel drilling screw
Drilled Lexan 8" x 12" x 0.060 for Magnum board with
1-5/8" nylon standoff with 5/32" Snap Both Ends

- Ship Weight..... 3.84 lb (approx)
- Box Dimensions..... 13.25" x 9" x 5" (approx)

5580 Enterprise Pkwy., Fort Myers, FL 33905

Office: 239-694-0089 • Fax: 239-694-0031 www.mcscontrols.com