


MCS-RO-EXT Description & Specifications

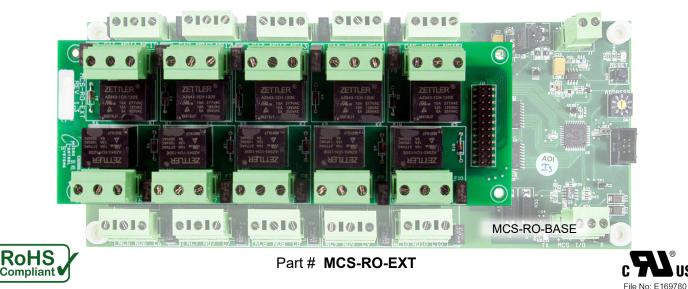

Description

The **MCS-RO-EXT** provides a flexible and cost effective way to allow relay output expansion for **MCS MAGNUM** and **Micromag**.

Each MCS-RO-EXT can be paired with a MCS-RO-BASE to double the number of outputs. Each MCS-RO-EXT board is powered by the MCS-RO-BASE board once it is stacked on top. The printed circuit board is a four layer board with a separate power and ground plane to provide the ultimate in efficient electrical noise suppression. This coupled with noise suppression circuitry makes the MCS-RO-EXT virtually impervious to electrical noise.

The MCS-RO-EXT ten relay outputs fused at 5.0 amps. Each relay output provides common, normally open and normally closed contacts on a removable terminal block. The terminal blocks provide screw connections which eliminate the need for sta-cons. Because the terminal blocks are removable, board replacement requires no wires to be removed. Once the MCS-RO-EXT is paired with the MCS-RO-BASE the number of relays are expanded from 10 to 20 allowing twice the number of relay outputs in the same footprint of one MCS-RO-BASE.

Specifications

Controller

Dimensions	. 7.2"l, 2.5"w, 2.50"h
Mounting	Mounts on top of the MCS-RO-BASE
	by 4 nylon standoffs and a stacker
	header (included on MCS-RO-BASE)
Operating Temperature	-40°F to +158°F (-40°C to +70°C)
Operating Humidity	.0-95% Non-Condensing
Storage Temperature	40°F to +158°F (-40°C to +70°C)
Relay Outputs (RO)	. 10 outputs 5amps @ 230VAC
Printed Circuit Board	. Four layer with separate power
	and ground planes
Input Power (Standard)	. Powered by MCS-RO-BASE
	12 vdc Regulated Power Supply
Minimum (Brown in)	10.54 vdc
Amp Draw (Loaded)	660.0 mA (total RO Ext & RO Base)
Power Detection	. Automatic Power Fail
	Reset on MCS-RO-BASE

Packaging

Kit of (4) #6-32 x 1" Female/Female Hex Nylon Tapped Spacers Kit of (1) 12 Pin Double Strip Header, 2.54mm Center, Straight	
Ship Weight	0.72 lb (approx)
Box Dimensions	10" x 4.5" x 3.375" (approx)

Revision - 2025-03-19