



RE-MI Series

*High IPLV and SEER
design Screw compressor
dedicated to:*

*R134a, R513A, R450A
R1234ze and R1234yf*

**Variable Volume Ratio
RE-MI Series**

VFD Screw Compressor




5580 Enterprise Pkwy., Fort Myers, FL 33905 Office (239) 694-0089 Fax: (239) 694-0031

www.mcscontrols.com

Highlights of RE-VI Compressor Features

Variable Compression Ratio

- Remarkable dual slide valve mechanism
- Designed for water-cooled and air-cooled chillers
- Volume ratio variable and exactly match working lift
- No loss of work due to over- or under-compression
- Exceptional partial load efficiency, great energy saving

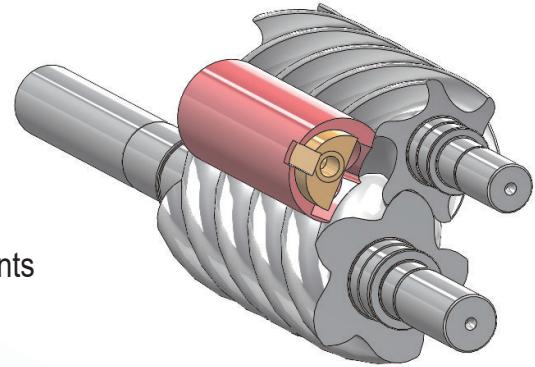

VFD Capacity Control

- Near-zero inrush current to motor and electronic components
- Quickly respond to cooling load
- Precisely control of chilled liquid temperature
- Varying motor speed, use the power that necessary
- Less starting torque, increase electric motor life cycle

Advanced Screw Rotor Profile


- Large displacement with short sealing line
- Compact in size with hyper volumetric efficiency
- Small torque transmission and low frictional loss

Low Oil Carry-over Separator

- Finest 3-step oil separation with minimum pressure drop
- Low carry-over, great heat transfer efficiency
- Simple but highly reliable oil separation

Quiet Operation, Low Vibration, Long Compressor Life

- Dedicated oil circuit to cool and lubricate bearings and rotors
- Sturdy compressor mounting and compression chamber
- Comprehensive protection devices

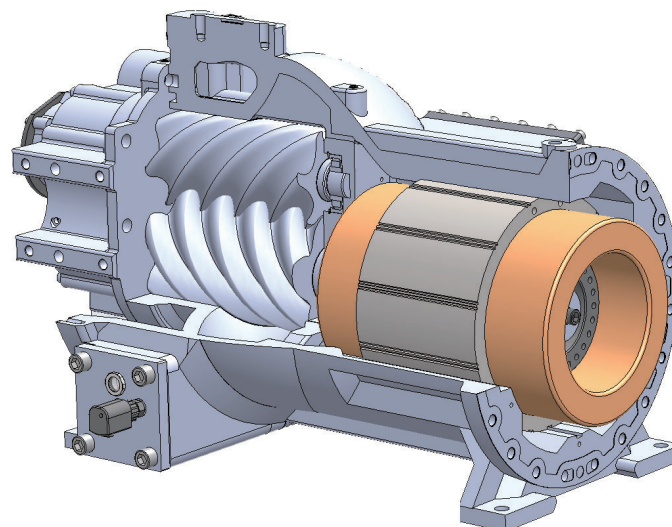

Compressor Protection & Devices

- Motor winding temperature protection
- Discharge temperature protection
- INT69HBY protector module
- Optical oil level switch
- Oil filter with replaceable cartridge
- Insulated oil heater
- Internal pressure relief valve
- Non-return valve and service stop valve
- Nitrogen protective charge
- IP54 Terminal box
- Minimum pressure valve (optional)
- Pressure differential switch (optional)
- Oil flow switch (optional)
- Liquid injection to motor expansion valve (optional)

Compressor Nomenclature

RE - xxx x x VI




Technical Data


MODEL	COMPRESSOR			MOTOR			LUBRICANT CHARGE	WEIGHT	
	Displacement at Max. speed	Speed Range	Vi Control	Nominal Hp at Max. speed		Motor Starter			Voltage (V) at Max. speed
	m ³ /hr	Hz		A	B		V		
RE-300AVI/ BVI	369	20~60	Low Medium High	70	97	VFD	380 ~ 480	16	480
RE-340AVI/ BVI	423			80	108			16	550
RE-380AVI/ BVI	471			90	122			16	570
RE-420AVI/ BVI	501			97	146			16	600
RE-480AVI/ BVI	579			107	166			17	630
RE-550AVI/ BVI	666			131	185			19	670
RE-620AVI/ BVI	752			146	215			23	870
RE-710AVI/ BVI	857			166	233			26	920
RE-820AVI/ BVI	987			196	257			28	1050
RE-920AVI/ BVI	1112			215	298			28	1135

Application Limits


RE-AVI

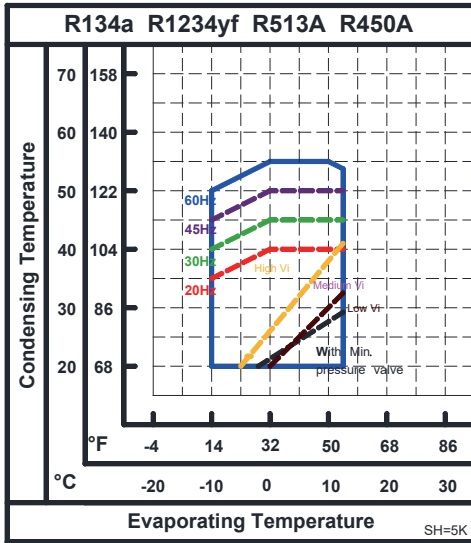


RE-BVI

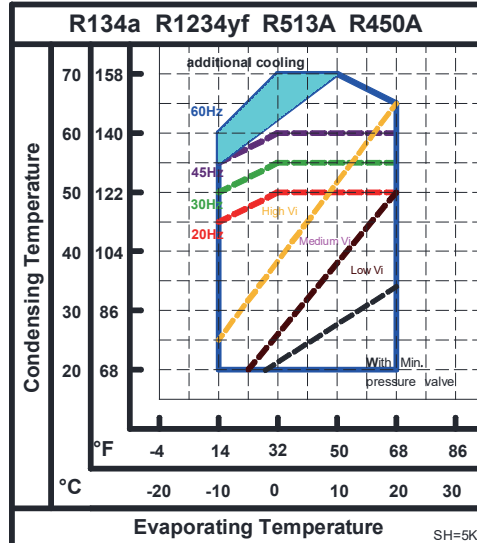

R1234ze

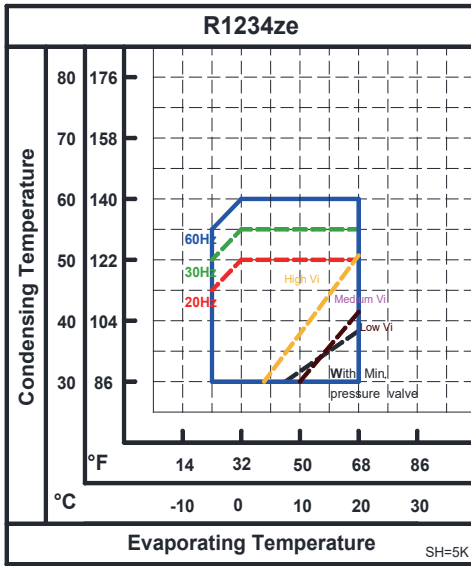

R1234ze

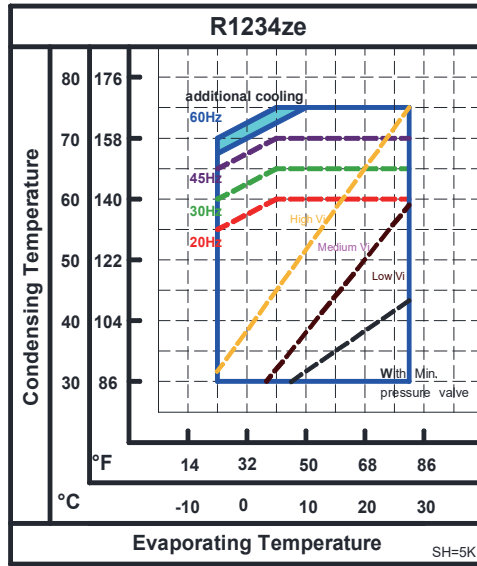

To apply the refrigerant not listed above, please contact Hanbell for application guide.



North American Distributor of Hanbell Compressors



5580 Enterprise Parkway / Fort Myers, FL 33905 / Phone: 239-694-0089

www.mcscontrols.com