




Hanbell *Screw* Compressor RC2 Cut-A-Way

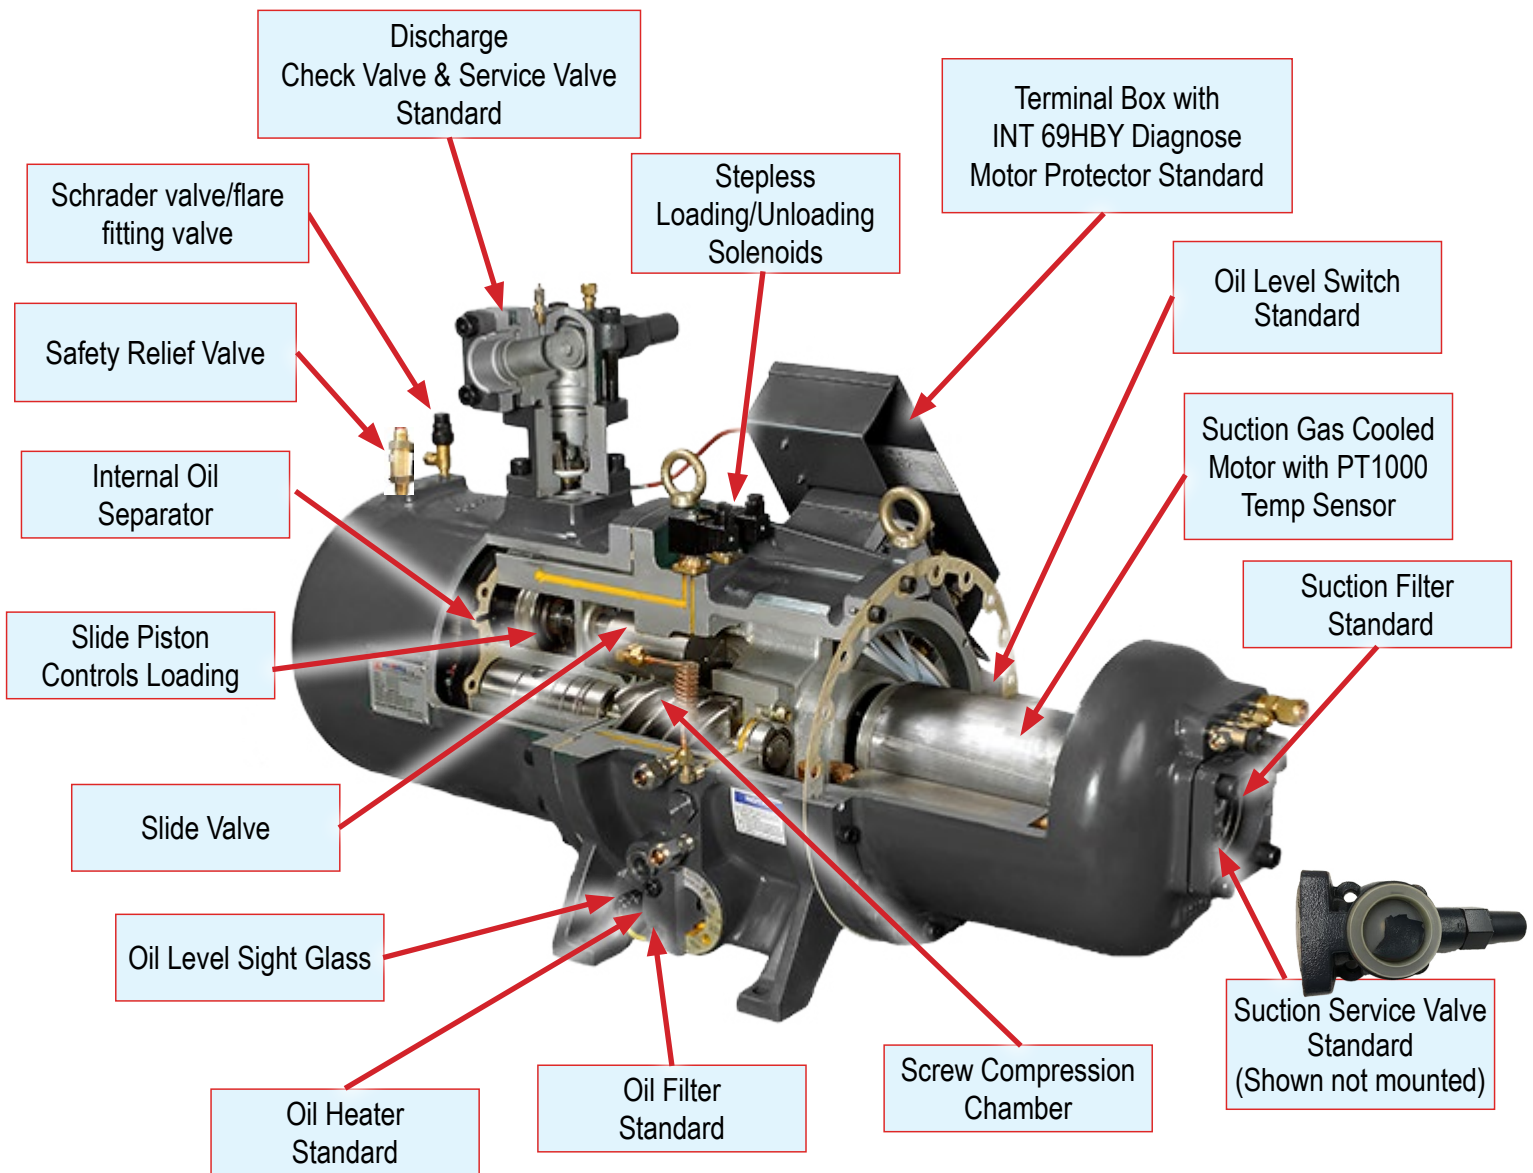

Ports

- External Oil Cooler - In/Out
- Liquid Injection (into suction pipe) (or remote)
- Liquid Injection (into screw chamber)
- Economizer
- Suction & Discharge Service Valve
- Oil Sump Service Valve



Standard Compressor Accessories

- 3 Solenoid Modulating Slide Capacity from 50% to 100%, start at 25% or 35% depending on model.(Models RC2-100,140 &180 can be 33% to 100%)
- Available motors, Star Delta, Across the Line and Part Wind.
- Weather Proof Terminal Box for outdoor applications
- 115/230 Capacity Control Solenoids
- 115/230 Crankcase heater
- Spring Loaded Discharge Check Valve
- Discharge Service Valve (Discharge Stop Valve) with standard connection sizes and supplied with flanges and bushings
- Suction Service Valve (Suction Stop Valves) with standard connection sizes and supplied with flanges and bushings
- Oil Level Float Switch
- Oil Filter
- Suction Filter
- Oil Sight Glasses
- PT1000 Motor Temperature Sensor to connect to Micro Controller
- 3 PTC Temperature Sensors are embedded in Motor Winding & 1 Discharge PTC Sensor connected in series to the Motor Protection Module (INT69HBY) for High Temperature Safety
- INT69HBY Diagnose also provides Phase Loss and Phase Reversal Protection when compressor starts. Has flash code and history download capability.

Ports

- External Oil Cooler - In/Out
- Liquid Injection (into suction pipe, see installation start up guide)
- Liquid Injection (into screw chamber)
- Economizer
- Suction & Discharge Service Valve
- Oil Sump Service Valve