See reverse side if you are mounting

using gasket seal

Instructions for mounting without a gasket seal


Package contains the following:

MCS-KEYPAD-OEM - color black

1. Cut hole in your enclosure using MCS-KEYPAD-OEM Template, available at;

https://mcscontrols.com/micros.html#MCS-MAGNUM

- 2. Use the **6 holes** shown in photo to mount the keypad, 3 on each side, use #6/32 thread size x 0.500 long bolt and Keps nut (not supplied).
- 3. Top-center & bottom center mounting holes on OEM keypad only to be used when water tight seal is required.

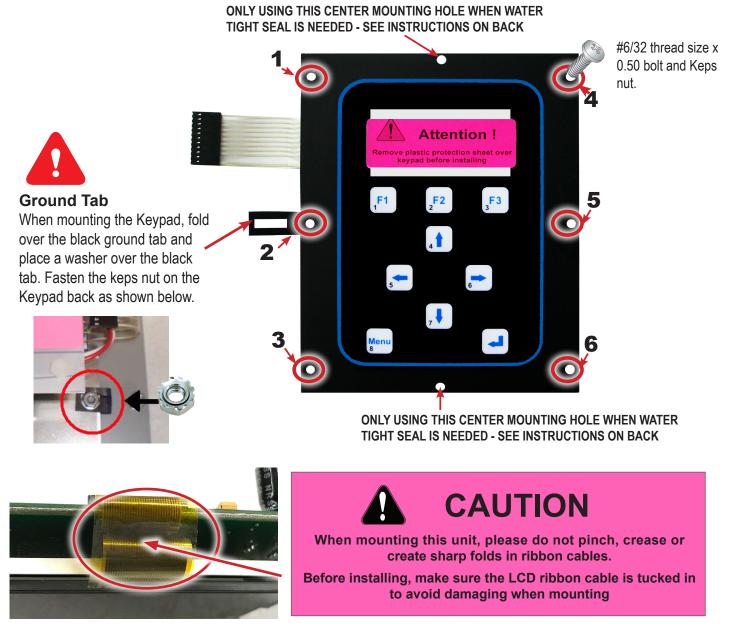



Instructions for mounting using a Gasket Seal (not supplied)

Package contains the following:

MCS-KEYPAD-OEM - color black

1. Cut hole in your enclosure using MCS-KEYPAD OEM-Template, available at;

https://mcscontrols.com/micros.html#MCS-MAGNUM

- 2. Use the <u>8 holes</u> shown in photo to mount the keypad, use #6/32 thread size x 0.500 long bolt and Keps nut. NOTE: **ON THE TOP HOLE #2, USE A 'ACORN NUT** TO AVOID DAMAGING RIBBON CABLE. (not supplied)
- 3. Top-center & bottom center mounting holes on OEM keypad <u>MUST</u> be used when water tight seal is required.

