



SOFTWARE RELEASE NOTES


MCS-CONFIG Version 8.10F 08/29/2011

Updates from previous versions:

New Features:

1. Added new function to the header button in the Enable/Disable Sensor Faults column of the SI screen that allows the user to disable all of the sensor faults to their default values (-99.9 and 999.9) or enable all sensor faults to their values saved in the config file. This will also affect the Low Sensor Fault and High Sensor Fault columns.

Sensor Fault Low	Sensor Fault High	Enable/Disable Sensor Faults (Click here for all)
-99.9	999.9	DISABLED ...
20	60	ENABLED ...

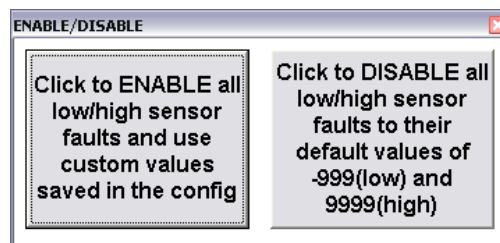

Bug Fixes:

1. Fixed print issue in the "BMS Points Setpoint Grid Info" where the printout is displaying all activated setpoints instead of showing only the setpoints that are on the BMS Points Setpoints Grid.
2. Fixed bug where the Oil heater was not displaying in Circuit Relay Output sequence list when a Hanbell Screw Compressor is selected.

Any questions regarding this release, contact:
support@mcscontrols.com

Micro Control Systems, Inc. 5580 Enterprise Parkway Fort Myers, Florida 33905
(239)694-0089 FAX: (239)694-0031 www.mcscontrols.com

Information contained in this document has been prepared by Micro Control Systems, Inc. and is copyright © protected 2012. Copying or distributing this document is prohibited unless expressly approved by MCS.