




MAG-KEYPAD-OEM-232

Description & Specifications

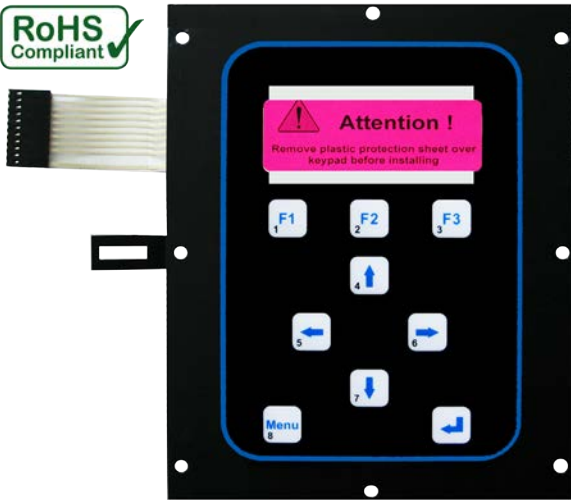

Part # MAG-KEYPAD-OEM-232

Specifications

Keypad/LCD
NEMA rated Type 1

| | |
|----------------------------|--|
| Display..... | 128 x 64 dot pixel STN monochrome graphics LCD with 2.8" diagonal viewing area |
| Color..... | White characters on a blue background (Reversible) |
| Keypad Size..... | 7.25"w x 8.50"h (8 mounting studs) |
| Keypad Layout..... | 9 keys (3 function keys) |
| Connection..... | 6 conductor shielded cable (max length of cable is 10 feet) |
| RS-485 Comm Port..... | 1 @ 19,200 baud |
| RS-232 Comm Port..... | 1 @ 19,200 baud |
| Operating Temperature..... | -4°F to +158°F (-20°C to +70°C) |
| Operating Humidity..... | 0-95% Non-Condensing |
| Storage Temperature..... | -22°F to +185°F (-30°C to +85°C) |

Description

The **MAG-KEYPAD-OEM-232 Warranty replacement** contains the necessary parts to replace keypads under warranty.

The Magnum Keypad consists of: three function keys, four directions keys and two selection keys (Menu & Enter)

The display LCD is 128 x 64 dot pixel graphics, 2.8" diagonal viewing area with white characters on a dark background (reversible).

There are two communication ports, one RS485 and one RS232 on the back of the replacement keypad.

Optional cable **EXTENDERS** - RS485 and RS232 are available as options.

Options

-2424vac input power ±10%
50/60Hz @ 77°F (25°C) ambient


MCS-RS232-EXTENDER

MCS-RS485-EXTENDER



Kit Contains

MAG-KEYPAD-OEM-232

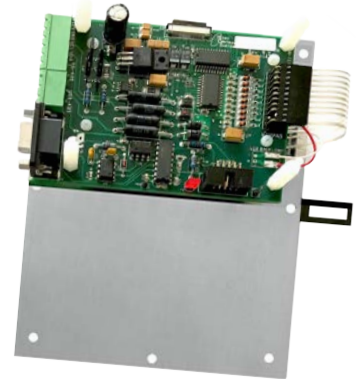

An instruction sheet is enclosed with each kit for proper installation.

Revision - 2019-10-29